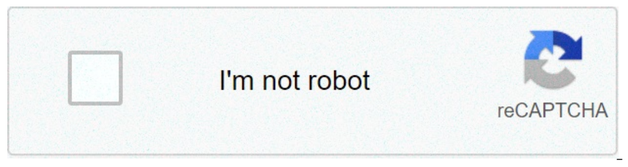

Continue

Mechanics of materials 6th edition solutions chapter 11

Download & View Beer and Johnson Dynamic Chapter 11 Solution as PDF for free This expansive textbook survival guide covers the following chapters and their solutions. Since 134 problems in chapter 11 have been answered, more than 44430 students have viewed full step-by-step solutions from this chapter. Mechanics of Materials was written by and is associated to the ISBN: 9780073380285. This textbook survival guide was created for the textbook: Mechanics of Materials, edition: 6. Chapter 11 includes 134 full step-by-step solutions. 11 energy methods- Mechanics of Materials - 4th - Beer Upcoming SlideShare Loading in …5 × 1 Like this presentation? Why not share! 1. MECHANICS OF MATERIALS Fourth Edition Ferdinand P. Beer E. Russell Johnston, Jr. John T. DeWolf Lecture Notes: J. Walt Oler Texas Tech University CHAPTER © 2006 The McGraw-Hill Companies, Inc. All rights reserved. 11 Energy Methods 2. © 2006 The McGraw-Hill Companies, Inc. All rights reserved. MECHANICS OF MATERIALSFourth Edition Beer • Johnston • DeWolf Energy Methods Strain Energy Strain Energy Density Elastic Strain Energy for Normal Stresses Strain Energy For Shearing Stresses Sample Problem 11.2 Strain Energy for a General State of Stress Impact Loading Example 11.06 Example 11.07 Design for Impact Loads Work and Energy Under a Single Load Deflection Under a Single Load Sample Problem 11.4 Work and Energy Under Several Loads Castigliano's Theorem Deflections by Castigliano's Theorem Sample Problem 11.5 3. © 2006 The McGraw-Hill Companies, Inc. All rights reserved. MECHANICS OF MATERIALSFourth Edition Beer • Johnston • DeWolf • A uniform rod is subjected to a slowly increasing load • The elementary work done by the load P as the rod elongates by a small dx is which is equal to the area of width dx under the load- deformation diagram. workelementarydxPdU == • The total work done by the load for a deformation x1, which results in an increase of strain energy in the rod. energystrainworktotaldxPU x === ∫ 1 0 112 12 12 1 0 1 xPkxdxkxU x === ∫ • In the case of a linear elastic deformation, Strain Energy 4. © 2006 The McGraw-Hill Companies, Inc. All rights reserved. MECHANICS OF MATERIALSFourth Edition Beer • Johnston • DeWolf Strain Energy Density • To eliminate the effects of size, evaluate the strain- energy per unit volume, densityenergystraindu L dx A P V U xx x == = ∫ ∫ 1 1 0 0 ε εσ • As the material is unloaded, the stress returns to zero but there is a permanent deformation. Only the strain energy represented by the triangular area is recovered. • Remainder of the energy spent in deforming the material is dissipated as heat. • The total strain energy density resulting from the deformation is equal to the area under the curve to ε1. 5. © 2006 The McGraw-Hill Companies, Inc. All rights reserved. MECHANICS OF MATERIALSFourth Edition Beer • Johnston • DeWolf Strain-Energy Density • The strain energy density resulting from setting ε1 = εR is the modulus of toughness. • The energy per unit volume required to cause the material to rupture is related to its ductility as well as its ultimate strength. • If the stress remains within the proportional limit, E E dEu xx 22 2 1 2 1 0 1 σε εε ε === ∫ • The strain energy density resulting from setting σ1 = σY is the modulus of resilience. resilienceofmodulus E u Y Y == 2 2 σ 6. © 2006 The McGraw-Hill Companies, Inc. All rights reserved. MECHANICS OF MATERIALSFourth Edition Beer • Johnston • DeWolf Elastic Strain Energy for Normal Stresses • In an element with a nonuniform stress distribution, energystraintotallim 0 === Δ Δ = ∫→Δ dVuU dV dU V U u V • For values of u < uY , i.e., below the proportional limit, energystrainelasticdV E U x 2 2 ∫ == σ • Under axial loading, dxAdVAPx ==σ ∫= L dx AE P U 0 2 2 AE LP U 2 2 = • For a rod of uniform cross-section, 7. © 2006 The McGraw-Hill Companies, Inc. All rights reserved. MECHANICS OF MATERIALSFourth Edition Beer • Johnston • DeWolf Elastic Strain Energy for Normal Stresses I yM x =σ • For a beam subjected to a bending load, ∫∫ == dV EI yM dV E U x 2 222 22 σ • Setting dV = dA dx, dx EI M dxdAy EI M dxdA EI yM U L L A L A ∫ ∫ ∫∫ ∫ = ⎪⎪⎪